


LR06W (1.0)

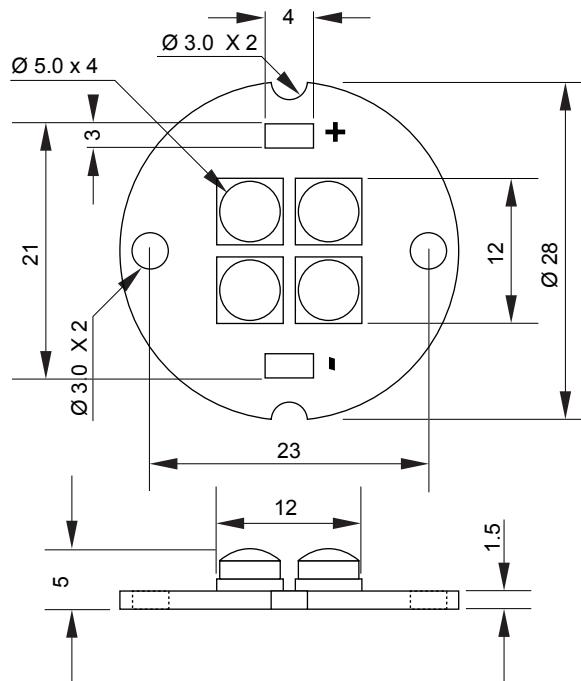

Absolute Maximum Rating at ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Maximum Rating	Unit
Power Dissipation	Pd	4	W
Forward Current	If	500	mA
Forward Voltage	Vr	6.3	V
Operating Temperature Range	Topr	- 40 °C to + 85 °C	
Storage Temperature Range	Tstg	- 40 °C to + 85 °C	
Solder Temperature 1/16 Inch Below Seating Plane for 3 seconds at 260 °C			

* Condition for Ifp is pulse of 1/10 Duty Cycle, 0.1ms Pulse Width

Electrical/Optical Characteristics at $T_a=25^\circ\text{C}$

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	Vf	If=20mA		6.3		V
Reverse Current	Ir	Vr=5V			100	uA
Dominant Wavelength	d	If=20mA				nm
Peak Wavelength	p	If=20mA				nm
Viewing Angle	2	If=20mA		120		dfg